

INTEGRATED AUTOMATION

Control Panel VENTS iFan



HUMIDITY MODE /
Humidity control adjustments

TIMER / Switch delay and runout time control

SPEED / Fan speed control adjustment

SWITCH DELAY / Fan switch delay control

24 HOURS / Permanent ventilation

MODE / Fan mode control

Control Panel VENTS iFan Move



HUMIDITY MODE /
Humidity control adjustments

TIMER / Switch delay and runout time control

SPEED / Fan speed control adjustment

ON/OFF MOVE / Turning motion sensor on/off

SWITCH DELAY / Fan switch delay control


24 HOURS / Permanent ventilation

MODE / Fan mode control


TECHNICAL PARAMETERS

Model	Spigot diameter [mm]	Speed	Max. air flow [m³/h]	Noise level, 3 m dB(A)	Air flow, factory settings [m³/h]	Air flow control range [m³/h]
iFan / iFan Move	Ø 100	24 Hours	33	17	33	-
		silent	72	22	72	33...72
		max	106	31	82	72...106
Ø 125	-	24 Hours	40	17	40	-
		silent	83	21	83	40...83
		max	133	32	97	83...133

OVERALL DIMENSIONS

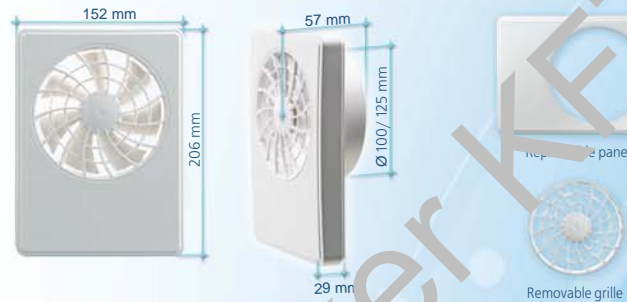

DECORATIVE FRONT PANEL COLOURS*



*Decorative front panels are available upon separate order

CREATE INDIVIDUAL VENTS iFan design



Information in catalogue is for reference only. VENTS reserves the right to modify any of its products' features, designs, components and specifications at any time and without notice to maintain the development and quality of manufactured goods.

08/2012



iFan
intelligent fan

INTELLECTUAL VENTILATION



Fresh air
in your house!

VENTS
www.ventilation-system.com

iFan MOVE

Model with intellectual humidity control and extra motion sensor control



iFan

Basic model with intellectual humidity control



VENTS company, the worldwide ventilation leader, has developed the ultramodern innovative iFan based on advanced ventilation technologies. Discover absolutely new horizons for intellectual microclimate control in the bathroom with the VENTS iFan!

21 dB(A)

3,8 W

133 m³/h

Ø100/125

100-240 V
50-60 Hz

STABLE

Power pulser with a broad power supply range from 100 to 240 V (50-60 Hz) provides stable operation in various power mains with versatile electric standards.

SMART

With integrated VENTS iFan control functions, intelligent automation and the remote controller you can set individual adjustments for the fan operations based on humidity, motion, speed and running time. VENTS iFan creates the most comfortable microclimate following your personal preferences.



EXTRA SLIM

VENTS iFan has an extra slim casing. Its thickness without spigots is only 29 mm and can be installed both vertically or horizontally. The delivery set includes two spigots, Ø 100 mm and 125 mm.



ELEGANT

VENTS iFan is distinguished by its specially developed elegant impeller and front panel design. The classic white front panel may be replaced by one of six decorative colour panels to let you enjoy a great look in any interior.



ENERGY EFFICIENT

VENTS iFan is featured with extremely low energy demand – only 3.8 W, which reduces operating costs drastically.



REMOTE CONTROLLER

Remote setting and control of all VENTS iFan functions from the remote controller.



SUPER SILENT

The motor fixation on a special vibration mount and the aerodynamically optimized impeller shape provide super silent operation 21 dB(A), which is combined with high air performance up to 133m³/h.

