

Series  
**VENTS**

**VUT/VUE 250 V mini**



Air handling units in compact sound- and heat-insulated casing with vertical duct connections.  
Maximum air flow – **250 m³/h**

■ **Description**

The VUT/VUE 250 H/V mini A12 air handling units are the fully-featured ventilation units that ensure air filtration, fresh air supply and stale air extract. During the operation process the extract air heat is transferred to the supply air through the plate heat exchanger. All models are designed for connection to ø 125 mm round air ducts.

■ **Modifications**

**VUT 250 V mini A12:** models with vertical duct connections, fans with AC motors with an aluminium heat exchanger.

**VUT 250 H mini A12:** models with horizontal duct connections, fans with AC motors with an aluminium heat exchanger.

**VUE 250 V mini A12:** models with vertical duct connections, fans with AC motors with a heat exchanger of polymerized cellulose.

**VUE 250 H mini A12:** models with horizontal duct connections, fans with AC motors with a heat exchanger of polymerized cellulose.

Series  
**VENTS**

**VUT/VUE 250 H mini**




Air handling units in compact sound- and heat-insulated casing with horizontal duct connections.  
Maximum air flow – **250 m³/h**

■ **Casing**

The casing of the VUT/VUE 250 V/H unit is made of aluzinc steel, internally filled with 20 mm mineral wool heat- and sound-insulating layer. The casing of the VUT/VUE 250 V/H mini White unit is made of high-quality polymer coated white steel.

■ **Filter**

Two built-in filters with filtering class G4 provide efficient supply and extract air filtration. F8 filter is available as an option for supply air filtration.




■ **Fans**


The unit is equipped with a supply and exhaust centrifugal fan with backward curved blades and integrated overheating protection thermostat with automatic restart. The motors and the impellers are dynamically balanced.

■ **Heat exchanger**

**VUE mini:** plate heat exchanger made of polymerized cellulose with heat recovery efficiency up to 78 %. The applied heat exchanger enables not only heat but also humidity recovery, which helps maintaining a comfortable humidity level. In warm seasons the heat exchanger operates to cool down and dehumidify the supply air. In cold seasons the heat exchanger operates to warm up supply air and humidify it.

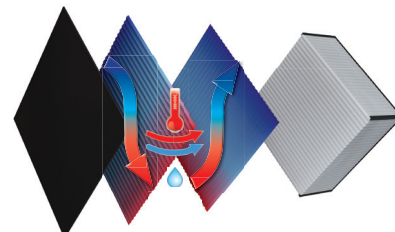

**VUT mini:** the plate heat exchanger is made of aluminium plates. Whenever heat recovery is not required for unit operation, the heat exchanger block can be easily replaced by a summer block. The unit is equipped with a drain pan for condensate drainage and removal as well as with a built-in frost protecting system. The heat from the warm extract air is transferred to the cold supply air during operation of the heat exchanger in winter time. Some condensate may form during extract air heat energy extraction. If the temperature of the intake air is below -5 °C, the condensate can get frozen.

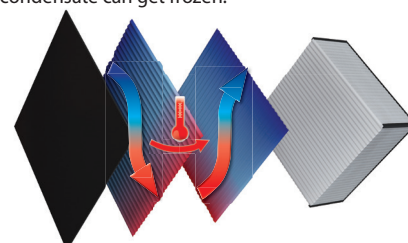

To prevent the heat exchanger freezing, electronic protection system is applied. It switches the supply fan off as the temperature sensor requires. Warm extract air defrosts the heat exchanger, then the supply fan switches on and the unit returns to normal operation.

**Designation key**

Series	Rated air flow [m³/h]	Spigot modification	Model	Casing colour	Integrated automation system
<b>VUT:</b> ventilation with heat recovery <b>VUE:</b> ventilation with energy recovery	250	<b>V:</b> vertical <b>H:</b> horizontal	<b>mini</b>	<b>_:</b> aluzinc <b>White:</b> white painted	<b>A12:</b> control panel (SRS-1)

### Control

The unit is equipped with the A12 (SRS-1) control panel. Speed and rotation control of the single-phase power-controlled motors allows turning the unit on/off and controlling its capacity. Several fans can be controlled synchronously in case their total current does not exceed the maximum permissible values for the controller current.

### Installation

Mounting to wall, floor or ceiling with fixing brackets. While mounting provide free access to the service panel for filter replacement and servicing. The correct mounted unit must provide condensate collecting and drainage. Universal casing design provides either left-handed or right-handed unit installation. It requires reversing of the front and the back panels.



### Accessories for air handling units

Model	G4 panel filter	F8 panel filter	Silencers		Back valves	Air dampers	Clamps	Summer blocks
								
VUT 250 V mini A12								
VUE 250 V mini A12	SF 240x184x40 G4	SF 240x184x40 F8	SR 125	SRF 125	KOM 125	KR 125	X 125	VL C4 200/240
VUT 250 H mini A12								
VUE 250 H mini A12								

### Overall dimensions of units

Model	Dimensions [mm]					
	ØD	B	H	H1	L	L1
VUT/VUE 250 V mini	125	300	443	490	713	43

Model	Dimensions [mm]					
	ØD	B	H	H1	L	L1
VUT/VUE 250 H mini	125	300	443	43	713	810

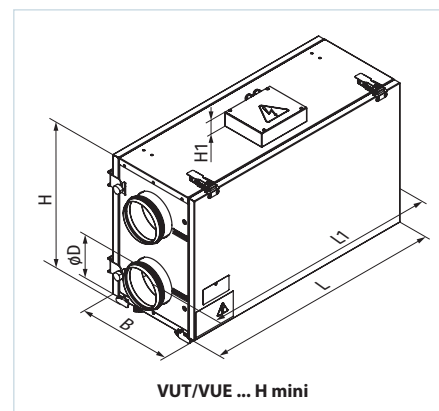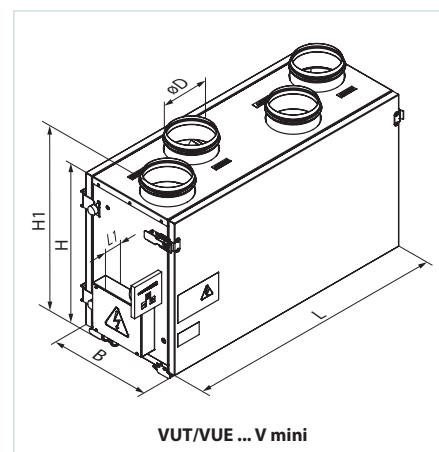

## Technical data

	VUT 250 H mini VUT 250 V mini	VUE 250 H mini VUE 250 V mini
Unit voltage [V/50 (60) Hz]	1 ~ 230	
Power [W]	148	
Current [A]	0.78	
Maximum air flow [m³/h]	250	
RPM [min⁻¹]	2700	
Sound pressure level at 3 m distance [dBA]	28-47	
Transported air temperature [°C]	from -25 up to +40	
Insulation	20 mm mineral wool	
Filter: extract/supply	G4	
Replaceable filter	G4 (option: F8 PM2.5 81 %)	
Connected air duct diameter [mm]	Ø 125	
Heat recovery efficiency [%]	55-78	52-73
Humidity recovery efficiency [%]	-	27-45
Heat exchanger type	cross-flow	
SEC class	B	
Heat exchanger material	aluminium	polymerized cellulose

